



Indigo Cash

PENDANT/SURFACE



Installation

Pendant installation from a single wire. Friction wire lock included with the luminaire.

Connection

The luminaire is equipped with 2.4 m white mains cable with earthed plug. When a pull-switch is used this is placed on the same side as the mains cable.

Design

Luminaire body in white (RAL 9016) and end-caps in alu-grey (RAL 9006) structured enamelled sheet steel.

Louvre

Beta – double parabolic reflector louvre with side and cross blades in satin matt metallized aluminium. Side and cross blade manufactured of MIRO.

Reflector


White enamelled secondary reflector for limited indirect lighting as well as aesthetical marking.

Accessories

Wire suspension, see accessories.

Miscellaneous

Available in designs for dimming, type SwitchDIM. Operated using a pull cord.



A

Luminaire with HF-std			
W	kg	Light dist.	
FDH			
2x28	6,0	A	44036

Luminaire with HF-dim dig.			
W	kg	Light dist.	
FDH			
2x28	6,0	A	44036-134¹⁾


¹⁾ Dimming via pull switch.

Accessories	
Wire pendant with ceiling cup in white plast. L=1,5 m, Ø 57 mm/pair	94414
Wire pendant with ceiling cup in grey plast. L=1,5 m, Ø 57 mm/pair	94416
Wire pendant with ceiling cup in white plast. L=1,5 m, Ø 57 mm for T-profile 25 mm/pair	94415
Wire pendant with ceiling cup in grey plast. L=1,5 m, Ø 57 mm for T-profile 25 mm/pair	94417

Indigo Cash is as standard supplied with mains cable and plug. If you prefer to do the electrical installation via a terminal block inside the ceiling cup, you should order wire suspensions from the luminaire Zora (page 59) under item 1. The mains cable fitted on the luminaire should then be removed.



Indigo Cash was developed to be used above cash registers.

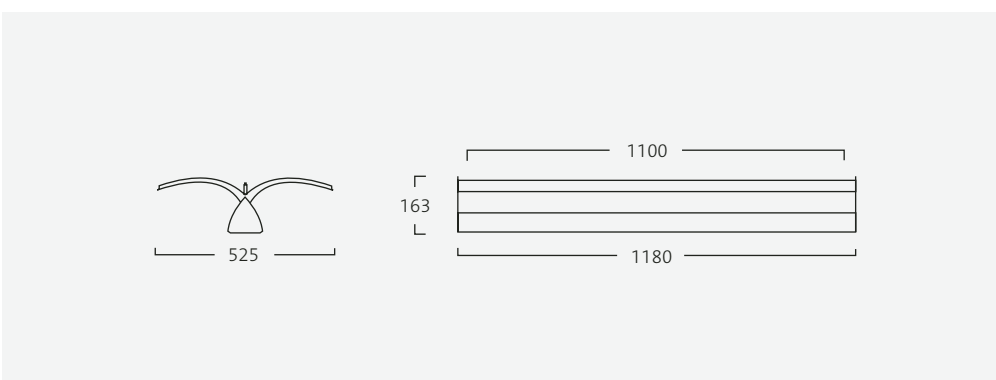

The light level on designs featuring dimming is adjusted using a pull switch.